


BISOL EasyMount™ Elegant HDPE 200

Quick & easy, no tools required




Technical Specifications	
Application	Flat roofs
Roof incline	Up to 5°
Method of installation	No roof penetration
Module angle	20°
Module orientation	Landscape
Module frame tolerances	Length: any / Width: 1,002 mm ± 3 mm (39.02°± 0.2°) Thickness: 34 – 41 mm (1.339° – 1.614°) Reverse side width: 27 – 32 mm (1.06° – 1.26°)
Base color	Carbon black
Base material	High-density polyethylene (HDPE), carbon black, UV-resistant (base) / Glass fibre reinforced polypropylene (screws)
Base weight	5.5 kg (12.1 lbs)
Additional stabilization	Ballast, windshields
Temperature range	-20 – 70°C
Snow load per system	0 – 2.40 kN/m ²

Allowed frame width on the reverse side of the module:

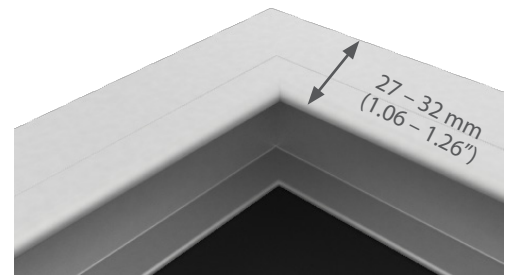

Dimensions of Elegant HDPE 200:

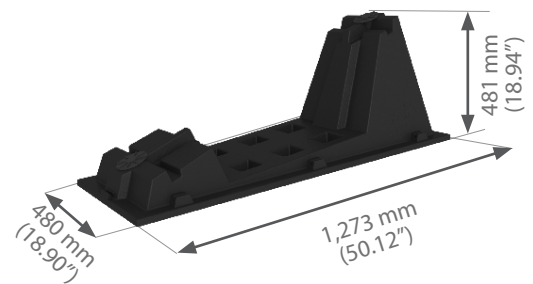

^[1]With the use of ballast and windshields according to the specifications.



8x faster installation



No tools required



Project and design tools available



Lightweight and stackable



Efficient cooling



Low installation cost